



**HAL**  
open science

## The use of the scintillation technique for monitoring seasonal water consumption of olive orchards in a semi-arid region

J. Ezzahar, Ghani Chehbouni, Joost Hoedjes, S. Er Raki, Ah Chehbouni, Gérard Boulet, J. M. Bonnefond, H. A. R. de Bruin

### ► To cite this version:

J. Ezzahar, Ghani Chehbouni, Joost Hoedjes, S. Er Raki, Ah Chehbouni, et al.. The use of the scintillation technique for monitoring seasonal water consumption of olive orchards in a semi-arid region. *Agricultural Water Management*, 2007, 89 (3), pp.179-184. 10.1016/j.agwat.2006.12.015 . ird-00389660

**HAL Id: ird-00389660**

**<https://ird.hal.science/ird-00389660>**

Submitted on 29 May 2009

**HAL** is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

available at [www.sciencedirect.com](http://www.sciencedirect.com)journal homepage: [www.elsevier.com/locate/agwat](http://www.elsevier.com/locate/agwat)

## The use of the scintillation technique for monitoring seasonal water consumption of olive orchards in a semi-arid region

J. Ezzahar<sup>a</sup>, A. Chehbouni<sup>b,\*</sup>, J.C.B. Hoedjes<sup>b</sup>, S. Er-Raki<sup>a</sup>, Ah. Chehbouni<sup>a</sup>,  
G. Boulet<sup>b</sup>, J.-M. Bonnefond<sup>c</sup>, H.A.R. De Bruin<sup>d</sup>

<sup>a</sup>Physics Department, Faculty of Sciences Semlalia, Marrakesh, Morocco

<sup>b</sup>IRD – Centre d'Etudes Spatiales de la Biosphère, BP 31055 Cedex Toulouse, France

<sup>c</sup>INRA, EPHYSE, Bordeaux, France

<sup>d</sup>Wageningen University Research Centre, Environmental Sciences Group, Centre for Water and Climate, Meteorology & Air Quality Group, P.O. Box 47, 6700 AA Wageningen, The Netherlands

### ARTICLE INFO

#### Article history:

Accepted 26 December 2006

#### Keywords:

Large aperture scintillometer  
Eddy covariance  
Energy balance  
Olive  
Flood irrigation  
Semi-arid region

### ABSTRACT

To monitor seasonal water consumption of agricultural fields at large scale, spatially averaged surface fluxes of sensible heat ( $H$ ) and latent heat ( $L_e$ ) are required. The scintillation method is shown to be a promising device for obtaining the area-averaged sensible heat fluxes, on a scale of up to 10 km. These fluxes, when combined with a simple available energy model, can be used to derive area-averaged latent heat fluxes. For this purpose, a Large Aperture Scintillometer (LAS) was operated continuously for more than one year over a tall and sparse irrigated oliveyard located in south-central Marrakesh (Morocco). Due to the flood irrigation method used in the site, which induces irregular pattern of soil moisture both in space and time, the comparison between scintillometer-based estimates of daily sensible heat flux ( $H_{LAS}$ ) and those measured by the classical eddy covariance (EC) method ( $H_{EC}$ ) showed a large scatter during the irrigation events, while a good correspondence was found during homogenous conditions (dry conditions and days following the rain events). We found, that combining a simple available energy model and the LAS measurements, the latent heat can be reliably predicted at large scale in spite of the large scatter ( $R^2 = 0.72$  and  $RMSE = 18.25 \text{ W m}^{-2}$ ) that is obtained when comparing the LAS against the EC. This scatter is explained by different factors: the difference in terms of the source areas of the LAS and EC, the closure failure of the energy balance of the EC, and the error in available energy estimates. Additionally, the irrigation efficiency was investigated by comparing measured seasonal evapotranspiration values to those recommended by the FAO. It was found that the visual observation of the physical conditions of the plant is not sufficient to efficiently manage the irrigation, a large quantity of water is lost ( $\approx 37\%$  of total irrigation). Consequently, the LAS can be considered as a potentially useful tool to monitor the water consumption in complex conditions.

© 2007 Published by Elsevier B.V.

\* Corresponding author at: Centre d'Etudes Spatiales de la Biosphère (CESBIO), 18 Avenue Edouard Belin, 31401 Toulouse Cedex 9, France. Tel.: +33 5 61 55 81 97; fax: +33 5 61 55 85 00.

E-mail address: [ghani@cesbio.cnes.fr](mailto:ghani@cesbio.cnes.fr) (A. Chehbouni).

0378-3774/\$ – see front matter © 2007 Published by Elsevier B.V.

doi:10.1016/j.agwat.2006.12.015

## 1. Introduction

The arid and semi-arid regions constitute roughly one third of the total earth surface. In these regions water scarcity is one of the main limiting factors for economic growth. The impact of such water scarcity is amplified by inefficient irrigation practices, especially since about 85% of available water is used for irrigation in these regions. In this context, several research programs have been designed to develop tools to support efficient management of irrigation water in arid and semi-arid zones. SUDMED (Chehbouni et al., 2003, 2004) and IRRIMED (<http://www.irrimed.org>) projects are amongst those programs taking place in the southern Mediterranean region. These projects focus on the assessment of temporal and spatial variability of water needs and consumption of irrigated agriculture under limited water resource conditions. The projects area is located in the Tensift river basin which includes the Haouz plain (near Marrakesh city, Morocco). In the Haouz plain the climate is semi arid and is characterized by low and irregular rainfall. The average amount of rainfall per year is about 240 mm, whereas the evaporative demand is very high – around 1600 mm per year – according to the FAO method (Allen et al., 1998). Cereals (wheat, barley), olive and citrus orchards are the dominating crops in the plain and use as much as 84% of the total available water.

Due to its high adaptability to semi-arid climate, olives make up the main component of the orchard in the Houaz plain. Flood irrigation is widely practiced by the majority of the farmers (more than 85%). Part of the water supplied to the orchard by rainfall and irrigation is effectively consumed by the crop, whereas the remaining is stored in the soil, percolates to deeper soil, or is lost through soil evaporation. In this regard, one can classify the loss in two categories: agronomical loss and hydrological loss. Agronomists consider that all the water which is not used by the plant is lost, while hydrologists judge only the soil evaporation to be lost since the infiltrated water is used to refill the ground water.

The present study focused on estimating seasonal water needs and consumption of a tall and sparse irrigated oliveyard (Agdal). Eddy covariance (EC) technique was used to monitor evapotranspiration, it is proven to be the most accurate method to measure evapotranspiration or latent heat flux:  $L_vE$  is a local measurement and therefore difficult to use in the case of heterogeneous surfaces, unless a network of EC systems is available which is very costly and require a well trained staff to operate and to maintain it. Moreover, over tall sparse vegetation such as an oliveyard, the variability of local fluxes appears to be large (e.g. Vogt et al., 2004), therefore, strictly speaking several EC systems are needed, whereas a scintillometer provides an area average. From the view point of the farmer, a scintillometer has the advantage that the receiver and detector are installed at the peripheral of the field and not in the centre. This seriously limits the applicability of such system at the scale of the irrigation district which is the relevant scale for water managers. For these practical reasons it is worth investigating the applicability of scintillometry over this tall sparse vegetating type. As far as we know such a study on scintillometer applicability to large scale water management has never been performed before.

In this context, the scintillation method which can provide either direct or indirect estimates of  $L_vE$  along a path length,

whose dimensions may range from a few hundred metres up to 10 km has been considered as an effective way to overcome this difficulty (Chehbouni et al., 1999). Three types of scintillometers are available: radio wave scintillometers (RWS), small aperture (laser) scintillometers (SAS), and large aperture scintillometers (LAS). The RWS, which operates at radio wavelength is the most sensitive to humidity fluctuations (Andreas, 1989) and is more suitable for directly obtaining  $L_vE$  over large areas. However, this type of scintillometer is not widely used since its system components are expensive and difficult to operate, moreover some interferences may occur especially close to cities (Meijninger et al., 2002a). Conversely, the LAS which operates in the visible and near-infrared wavelength region of the spectrum is relatively cheap and very robust which makes it suitable for operation in remote fields. This explains the fact that the LAS is regularly used nowadays in micrometeorological experiments (e.g. Chehbouni et al., 2000 (SALSA); Hoedjes et al., 2002 (Yaqui 2000); Hartogensis et al., 2002; Poulos et al., 2000 (CASES-99); Beyrich et al., 2000 (LITFASS-98), and 2006 (LITFASS-2003)).

However, the LAS only provides spatially averaged sensible heat flux ( $H_{LAS}$ ). As it has been shown in Meijninger et al. (2002a), latent heat flux ( $L_vE_{LAS}$ ) can then be obtained as the residual term of the energy balance equation providing estimates of available energy ( $R_n - G$ ), where ( $R_n$ ) is the net radiation and ( $G$ ) is the soil heat flux.

In this study the potential of the LAS to derive  $L_vE_{LAS}$  over a complex field was investigated. The complexity is due to the fact that the vegetation is tall and sparse, which means that transfer processes are more complex than for short and dense crops, and this Monin-Obukhov similarity theory may not apply. Moreover, flood irrigation creates a large heterogeneity in soil humidity, and in some cases advection from the surrounding areas occurred.

The main objective of this paper is two-fold: (1) to combine the LAS measurements with estimates of available energy to derive spatially averaged  $L_vE_{LAS}$ , and (2) to investigate the feasibility of using the LAS to monitor seasonal water consumption of olive orchards in the Haouz semi-arid plain and to document irrigation efficiency through the comparison between LAS-based estimates of evapotranspiration values to those recommended by the FAO method (FAO-56). This paper is organised as follows: a brief physical background of the scintillation method and the proposed models to estimate the available energy are first provided. Second, an overview of the experimental design follows with a presentation of the results before presenting comparisons between simulated and observed fluxes. Finally, a discussion about the potential of the LAS combined with the estimated available energy to calculate the  $L_vE$  over olive orchards, and the ability of this approach to monitor the water consumption over semi-arid land, is presented.

## 2. Theoretical background

### 2.1. Determining the sensible heat flux, $H_{LAS}$ , with LAS

The LAS is a device that provides measurements of the variation in the refractive index of air caused by atmo-

spheric turbulence. This instrument consists of a transmitter and a receiver installed at a certain height  $z_{LAS}$  above the surface. The LAS used in this study has an aperture diameter  $D$  of 15 cm. The transmitter emits electromagnetic radiation at wavelength  $\lambda = 940$  nm over a known path length ( $L$ ). The fluctuations in the light intensity at the receiver are analysed to give the variation of  $C_n^2$  along the path.

Hill et al. (1980) has related  $C_n^2$  with the structure parameters of temperature ( $C_T^2$ ), humidity ( $C_q^2$ ) and the covariant term ( $C_{Tq}$ ) as follows:

$$C_n^2 = \frac{A_T^2}{T^2} C_T^2 + \frac{A_T A_q}{Tq} C_{Tq} + \frac{A_q^2}{q^2} C_q^2 \quad (1)$$

where  $A_T$  and  $A_q$  are quantities that represent the relative contribution of each term to  $C_n^2$ , which are both dependent on optical wavelength and the mean values of temperature ( $T$ ), humidity ( $q$ ), and atmospheric pressure ( $p$ ). In the case of the LAS in this project, the values of  $A_T$  and  $A_q$  are given by Andreas (1989):

$$A_T = -0.78 \times 10^{-6} \frac{p}{T} \quad (2)$$

$$A_q = -57.22 \times 10^{-6} q \quad (3)$$

Generally, the first term, containing  $C_T^2$ , is much larger than the other two terms, except in the case where the Bowen-ratio  $\beta (=H_{LAS}/L_v E_{LAS})$  is much smaller than 1. Assuming that temperature and humidity fluctuations are perfectly correlated, Wesely (1976) showed that the temperature structure parameter  $C_T^2$  can be derived from the refractive index structure parameter  $C_n^2$  by:

$$C_T^2 = C_n^2 \left( \frac{T^2}{\gamma p} \right)^2 \left( 1 + \frac{0.03}{\beta} \right)^{-2} \quad (4)$$

where  $\gamma$  is the refractive index coefficient for air ( $7.8 \times 10^{-7} \text{ K Pa}^{-1}$ ). The final bracketed term is a correction for the effects of humidity.  $C_n^2$  and  $C_T^2$  are in ( $\text{m}^{-2/3}$ ) and ( $\text{K m}^{-2/3}$ ), respectively.

According to the Monin-Obukhov Similarity Theory (MOST), it is possible to link the temperature structure parameter  $C_T^2$  and the temperature scale  $T^*$  for unstable conditions, i.e.,  $L_{MO} < 0$ :

$$C_T^2 = T_*^2 (z_{LAS} - d)^{-2/3} h \left( \frac{z_{LAS} - d}{L_{MO}} \right) \quad (5)$$

where  $z$  and  $d$  are the measurement and displacement height, respectively,  $h$  is a universal function. Wyngaard et al. (1971) found the following relation for  $h$  under unstable conditions:

$$h \left( \frac{z_{LAS} - d}{L_{MO}} \right) = c_{T1} \left( 1 - c_{T2} \frac{z_{LAS} - d}{L_{MO}} \right)^{-2/3} \quad (6)$$

where  $c_{T1}$  and  $c_{T2}$  are constants, given by De Bruin et al. (1993) as 4.9 and 9.

Under stable conditions, Thiermann and Grassl (1992) proposed:

$$h \left( \frac{z_{LAS} - d}{L_{MO}} \right) = 6.34 \left( 1 + 7 \frac{z_{LAS} - d}{L_{MO}} + 20 \left( \frac{z_{LAS} - d}{L_{MO}} \right)^2 \right)^{1/3} \quad (7)$$

$L_{MO}$  is the Monin-Obukhov length (m) given by:

$$L_{MO} = - \frac{T_a u_*^2}{k g T^*} \quad (8)$$

with  $k = 0.41$  is the von Karman constant,  $g = 9.81 \text{ m s}^{-2}$  (gravity) and  $u_*$  ( $\text{m s}^{-1}$ ) is the friction velocity:

$$u_* = k u \left[ \ln \left( \frac{z_{LAS} - d}{z_0} \right) - \psi \left( \frac{z_{LAS} - d}{L_{MO}} \right) \right]^{-1} \quad (9)$$

$u$  is the wind speed and  $\psi$  is the integrated stability function defined for unstable conditions ( $z/L_{MO} < 0$ ) as (Panofsky and Dutton, 1984)

$$\psi \left( \frac{z_{LAS} - d}{L_{MO}} \right) = 2 \ln \left[ \frac{1+x}{2} \right] + \ln \left[ \frac{1+x^2}{2} \right] - 2 \arctan(x) + \frac{\pi}{2} \quad (10)$$

with

$$x = \left( 1 - 16 \frac{z_{LAS} - d}{L_{MO}} \right)^{1/4}$$

$z_0$  is the roughness length. Knowing  $u_*$  and  $T^*$ , the sensible heat flux  $H_{LAS}$  ( $\text{W m}^{-2}$ ) can be calculated as:

$$H_{LAS} = \rho c_p u_* T^* \quad (11)$$

with  $\rho$  ( $\text{kg m}^{-3}$ ) and  $c_p$  ( $\text{J kg}^{-1} \text{K}^{-1}$ ) are the air density and heat capacity, respectively.

The latent heat flux from the LAS is obtained as the residual the energy balance as (Meijninger et al., 2002a):

$$L_v E_{LAS} = R_n - G - H_{LAS} \quad (12)$$

In this study, a footprint model proposed by Horst and Weil (1992, 1994) was applied to determine the source areas for turbulent fluxes from the EC and the LAS (see Appendix A). In the case of the LAS, one has to combine footprint function with the spatial weighting function  $W(x)$  of the LAS in order to calculate the source area.

## 2.2. Proposed models to estimate available energy

### 2.2.1. Net radiation

The net radiation quantifies the energy available for crop evapotranspiration, photosynthesis, and soil heating (Monteith and Unsworth, 1990). Several authors have related net radiation to solar radiation by means of empirical relationships (André and Viswanadham, 1983; Kowalik and Turner, 1983; Mermier and Seguin, 1976). Unfortunately, these relationships may be difficult to be generalized to all surface and atmospheric conditions. In this study, the following

method for estimating net radiation at half-hourly time step from classical meteorological data is used. The net radiation is expressed as follows (Ortega-farias et al., 2000):

$$R_n = (1 - \alpha)R_g + \varepsilon_s R_a - R_t \quad (13)$$

where  $\alpha$  is the surface albedo,  $R_g$  is the solar global radiation ( $W m^{-2}$ ),  $\varepsilon_s$  is the surface emissivity,  $R_a$  the atmospheric radiation which is emitted by air molecules ( $W m^{-2}$ ) and  $R_t$  is the terrestrial radiation which is emitted by the surface ( $W m^{-2}$ ). By using the Stefan–Boltzman equation (Monteith and Unsworth, 1990),  $R_a$  and  $R_t$  can be expressed as a function of air and surface temperatures, respectively. Then, Eq. (13) can be rewritten as:

$$R_n = (1 - \alpha)R_g + \varepsilon_s \sigma (\varepsilon_a T_a^4 - T_{surf}^4) \quad (14)$$

with  $\varepsilon_a$  is the emissivity of the atmosphere,  $T_a$  is the air temperature (K),  $T_{surf}$  is the surface temperature (K), and  $\sigma$  is the Stefan–Boltzman constant ( $5.67 \times 10^{-8} W m^{-2} K^{-4}$ ). In this study,  $T_{surf}$  was estimated from measured soil and canopy temperatures weighted by the fractional area of vegetation (Norman et al., 1995):

$$T_{surf} \approx [f_c T_c^4 + (1 - f_c) T_s^4]^{1/4} \quad (15)$$

where  $f_c$  is the cover fraction of olive trees.

Many authors have proposed empirical relationships which relate the atmospheric emissivity to the air temperature (Angstrom, 1918; Brunt, 1932; Idso, 1981). In what follows, we used the expression proposed by Brutsaert (1975) where  $\varepsilon_a$  is computed from air temperature and vapour pressure as:

$$\varepsilon_a = 1.24 \left( \frac{e_a}{T_a} \right)^{1/7} \quad (16)$$

where  $e_a$  is the air vapour pressure (hPa). Brutsaert (1975) pointed out that the 1.24 value for the proportionality coefficient, which was derived on an atmospheric radiative transfer basis, should vary according to variations in the type of atmosphere. Hatfield et al. (1983) and Olioso (1992) found that the original coefficient in the Brutsaert formula (1.24) led to an underestimation in calculated atmospheric radiation by 5%.

#### 2.2.2. Soil heat flux

Due to the complexity of surface cover and physical processes occurring in the soil, the soil heat flux is the most difficult scalar to measure accurately at the appropriate space-scale. Several authors have related this scalar to the net radiation (Stull, 1988; Villalobos et al., 2000). In this study, we used the simple formula proposed by Su et al. (2001):

$$G = R_n [\Gamma_c + (1 - f_c)(\Gamma_s - \Gamma_c)] \quad (W m^{-2}) \quad (17)$$

in which they assume the ratio of soil heat flux to net radiation is  $\Gamma_c = 0.05$  for full vegetation canopy (Monteith, 1973) and  $\Gamma_s = 0.315$  for bare soil (Kustas and Daughtry, 1989).

### 3. Experimental site and measurements


#### 3.1. Site description

The experiment was carried out between day of year (DOY) 323 (2002) and DOY 323 (2003) at the 275 ha Agdal olive orchard which is located to the southeast of the city of Marrakech, Morocco ( $31^{\circ}36'N$ ,  $W007^{\circ}58'$ ). Fig. 1 displays the area of interest on a very high spatial resolution image acquired by the Quickbird satellite (0.62 and 2.4 m in panchromatic and multi-spectral, respectively). The climate is typically semi arid Mediterranean; precipitation falls mainly during winter and spring, from the beginning of November until the end of April, with an average ranging from 192 to 253 mm per year. The atmosphere is very dry with an average humidity of 56% and the evaporative demand is very high (1600 mm per year), greatly exceeding the annual rainfall.

The experiment was set up in the southern area of the Agdal orchard, of about 700 m  $\times$  800 m, surrounded by fields of orange and olive trees (Fig. 1). The average height of the olive trees is 6 m with an average coverage that reaches approximately 55%. Two water basins are used for irrigation. Water is diverted manually to every tree through a network of ditches, each tree is surrounded by a small earthen levy that retains the irrigation water, allowing application of irrigation water to every tree. The amount of water used during each irrigation event was about 80 mm. Irrigation starts on the southern border of the field, and, depending on available manpower, progresses towards the northern border of the site in approximately 12 days.

#### 3.2. Micrometeorological and flux measurements

The field was equipped with a set of standard meteorological instruments to measure wind speed and direction (with a

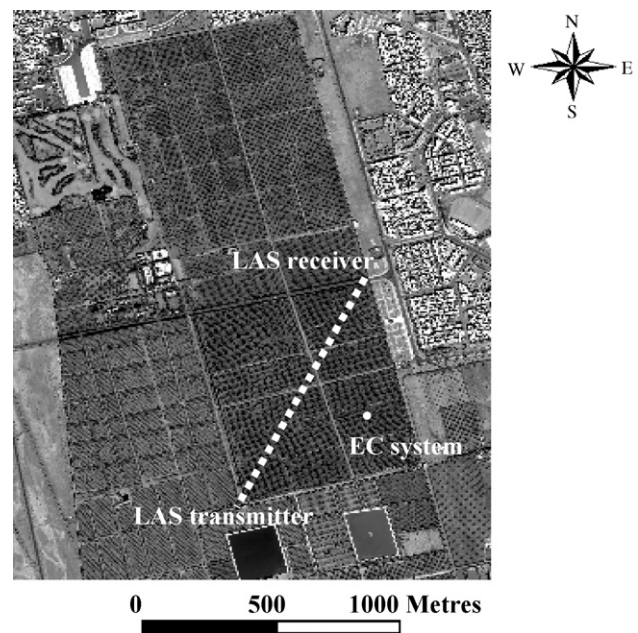


**Fig. 1 – Overview of the study site (Quickbird image). The white dotted line represents the LAS path, and the location of EC system is also presented.**

317 Young Wp200 anemometer), air temperature and humidity  
 318 (with a vaisala HMP45AC probe) at 9 m above the ground. The  
 319 four components of the net radiation were measured using a  
 320 CNR1 radiometer (Kipp & Zonen), i.e. independant estimates  
 321 incoming and outgoing solar and far-infrared radiation. The  
 322 CNR1 was located in a place (at 8.5 m) that is representative of  
 323 the vegetation and soil. Radiative soil and vegetation temper-  
 324 atures were measured using 2 IRTS-P's (Apogee). The soil  
 325 heat flux density was measured using heat flux plates (HFT3-L,  
 326 Campbell Scientific Ltd.) at three locations with contrasting  
 327 amounts of radiation reaching the soil. The measurement  
 328 depth was 1 cm. The plates were placed: one below the tree  
 329 near the trunk in order not to be exposed to direct solar  
 330 radiation; one was exposed directly to solar radiation, the last  
 331 one in an intermediate position. An average of these three  
 332 measurements was made to obtain a representative value. Soil  
 333 temperature was recorded at two locations at a depth of 0.05 m  
 334 (temperature probe 108). Soil moisture was measured at  
 335 different depths (0.05, 0.1, 0.2, 0.3 and 0.4 m) using 5 CS616  
 336 water content reflectometers (Campbell Scientific Ltd.). Mea-  
 337 surements were sampled at 1 Hz, averaged, and then stored at  
 338 30 min intervals on CR10X dataloggers.

340 An EC system was installed to provide continuous  
 341 measurements of vertical fluxes of heat, water vapour and  
 342 carbon dioxide (CO<sub>2</sub>) at 9.2 m (see Fig. 1). During the first three  
 343 months the EC system consisted of a 3D sonic anemometer  
 344 (CSAT3, Campbell Scientific Ltd.) which measured the fluctua-  
 345 tions in the wind velocity components and temperature, and  
 346 an open-path infrared gas analyser (LICOR-7500, Campbell  
 347 Scientific Ltd.) that measured concentration of water vapour  
 348 and carbon dioxide. Raw data were sampled at a rate of 20 Hz  
 349 and were recorded using a CR23X dataloggers (Campbell  
 350 Scientific Ltd.) which were connected to portable computer to  
 351 enable storage of large raw data files. After the first three  
 352 months of the experiment, the LICOR-7500 IRGA was replaced  
 353 by a Krypton hygrometer (KH20, Campbell Scientific Ltd.), and  
 354 the datalogging system was replaced with a CR5000 datalogger  
 355 (Campbell Scientific Ltd.), equipped with a 1 Gb PCMCIA-card  
 356 for the storage of large raw data files. The half-hourly fluxes  
 357 were later calculated off-line after performing planar fit  
 358 corrections (Wilczak et al., 2001), correcting the sonic  
 359 temperature for the presence of humidity (Schotanus et al.,  
 360 1983), frequency response corrections for slow apparatus and  
 361 path length integration (Moore, 1986), the inclusion of the  
 362 mean vertical velocity according to Webb et al. (1980) and  
 363 oxygen correction for the Krypton hygrometer, which is  
 364 sensitive to O<sub>2</sub> (Van Dijk et al., 2003). For the data processing,  
 365 use was made of the eddy covariance processing software  
 366 'ECpack', developed by the Meteorology and Air Quality Group,  
 367 Wageningen University. This software is available for down-  
 368 load at <http://www.met.wau.nl/>.


369 In order to ascertain that the height of the EC was adequate  
 370 and fulfils the conditions required for turbulent fluxes  
 371 measurements (i.e. the constant-flux layer), one can study  
 372 the behaviour of the temperature structure parameter ( $C_{TEC}^2$ ),  
 373 the temperature scale ( $T_{EC}^*$ ) and the Monin-Obhukov length  
 374  $L_{MON EC}$  derived from the EC according to MOST. For this  
 375 purpose, observed values of  $C_{TEC}^2(z_{EC} - d)^{2/3}/T_{EC}^{*2}$  have been  
 376 plotted against observed values of  $(z_{EC} - d)/L_{MON EC}$  in Fig. 2,  
 377 together with the scaling curve (Eq. (6)). The measurements

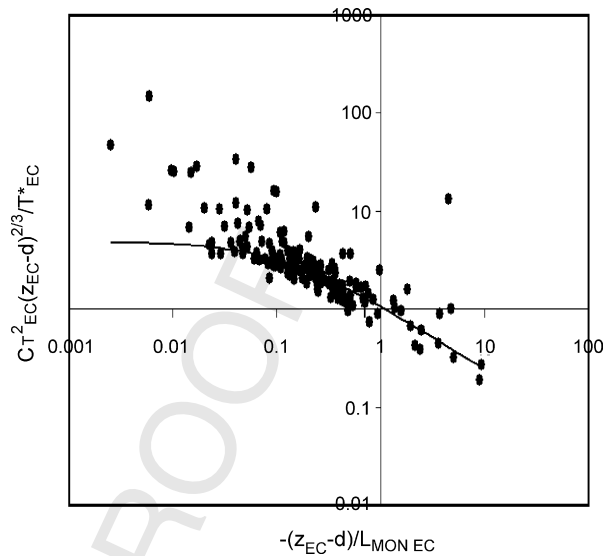

377 **Fig. 2 – Observed values of  $C_{TEC}^2(z_{EC} - d)^{2/3}/T_{EC}^{*2}$  plotted**  
 378 **against observed  $(z_{EC} - d)/L_{MON EC}$ , all data were derived from**  
 379 **the EC system. Solid line represents the scaling giving by**  
 380 **De Bruin et al. (1993):  $4.9(1 - 9(z_{EC} - d)/L_{EC})^{-2/3}$ .**

377 follow the shape of the theoretical scaling given by De Bruin  
 378 et al. (1993). Therefore, it can be conclude that the measure-  
 379 ments were taken in the constant-flux layer.

381 Additionally, two identical LAS were used in this experi-  
 382 ment, the first one (denoted LAS<sub>1</sub>) was operated from the  
 383 beginning of the experiment until DOY 12 (2003) and was then  
 384 replaced with the second one (denoted LAS<sub>2</sub>). Both of them  
 385 were built by the Meteorology and Air Quality Group  
 386 (Wageningen Agriculture University, the Netherlands). These  
 387 instruments were made according the basic design described  
 388 in Ochs and Wilson (1993). They have an aperture size of  
 389 0.15 m and the wavelength of the light beam emitted by the  
 390 transmitter is 940 nm. At the receiver,  $C_n^2$  was sampled at 1 Hz

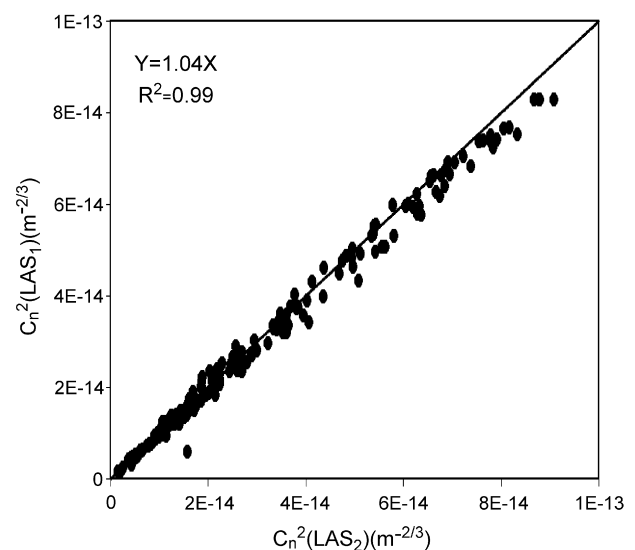

391 **Fig. 3 – Inter-comparison between the two scintillometers**  
 392 **referred as LAS<sub>1</sub> and LAS<sub>2</sub> used in the experiment.**

and averaged over 1 min time steps by a CR510 datalogger. The LAS were installed perpendicularly to the dominant wind direction with a path length of 1 km. The transmitter was mounted on a tripod installed on a roof, located on the southwest corner of the field, while the receiver was mounted on a 15 m high tower that was positioned next to the road (see Fig. 1). The path of the scintillometer was chosen so that the saturation effects are expected to be small (Kohsiek et al., 2006).


In order to be more confident in the consistency in the measurements made by both LAS, an inter-comparison of the two LAS was performed between DOY 284 (2002) and 288 (2003). To avoid possible interference between the two signals, the transmitter and receiver were alternated. They were deployed at the same height. The linear regression forced through the origin yielded ( $m^{-2/3}$ ):  $C_n^2(LAS_1) = 1.04C_n^2(LAS_2)$ ,  $R^2 = 0.99$ . This means that the agreement is excellent with 4% difference (Fig. 3). This small difference lies within acceptable instrumental error.

#### 4. Results and discussions


In this paragraph we first analysed the closure of the energy balance. Then the measured and simulated ( $R_n - G$ ) components were compared, as well as the sensible heat flux measured by EC ( $H_{EC}$ ) and that derived from the LAS ( $H_{LAS}$ ). After that, the feasibility of deriving the latent heat flux from the LAS with the estimated values of the available energy ( $R_n - G$ ) was checked, so that  $L_v E$  can be derived at large scale with a minimum number of instruments in the fields.

##### 4.1. Energy balance closure

The energy balance closure is an important indicator of the performance of an EC system. By ignoring the term of canopy

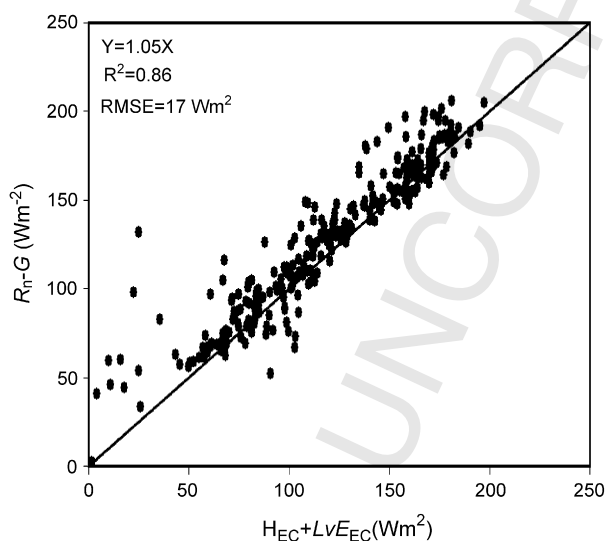

**Fig. 4 – Assessment of energy balance closure. Daily average fluxes of net radiation ( $R_n$ ) minus the soil heat flux ( $G$ ) are compared against the sums of sensible ( $H_{EC}$ ) and latent heat ( $L_v E_{EC}$ ) measured by the eddy correlation system.**

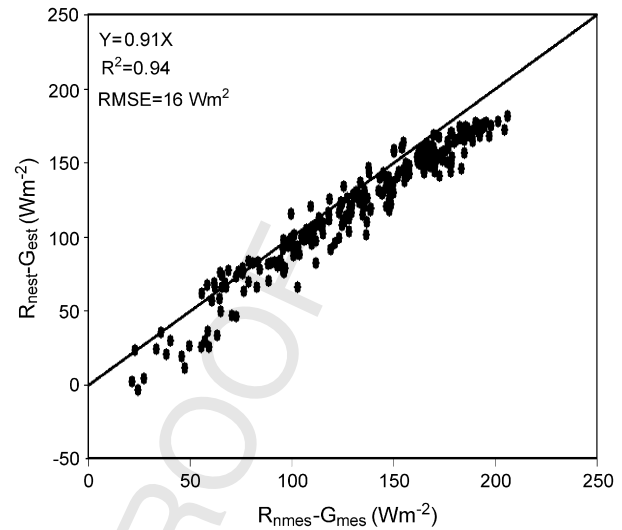


**Fig. 5 – Comparison between daily estimated ( $R_{nest} - G_{est}$ ) and observed ( $R_{nmes} - G_{mes}$ ) available energy.**

heat storage at daily time scale (Testi et al., 2004; Baldocchi et al., 2004) and assuming the principle of conservation of energy, the energy balance closure is defined as  $R_n - H_{EC} - L_v E_{EC} - G$  and should be close to zero ( $L_v E_{EC}$  is the latent heat flux derived from the EC). In this study all daily values were calculated by averaging up the half-hourly values. Fig. 4 presents a cross plot between measured ( $R_n - G$ ) and the sum of the turbulent fluxes ( $H_{EC} + L_v E_{EC}$ ) for daily time scale. A linear regression yields:  $R_n - G = 1.05(H_{EC} + L_v E_{EC})$  and  $R^2 = 0.86$ , with  $RMSE = 17 \text{ W m}^{-2}$  (the equation used to calculate RMSE is presented in Appendix B). The difference in terms of the sources areas of the different instruments has the biggest impact on the closure of the energy balance especially over sparsely vegetated surfaces. The source area sampled by eddy covariance is much larger than that of net radiation and soil heat flux and it can change rapidly depending on wind speed and direction and on surface conditions. However, comparatively to what has been reported in the literature (Testi et al., 2004; Baldocchi et al., 2004; Twine et al., 2000), the closure can be considered as fairly good.

##### 4.2. Estimating available energy

The net radiation is derived from Eq. (14) using an albedo value of 0.11 (annual averaged measured with CNR1), a surface emissivity of 0.98 (Jones et al., 2003), and the atmospheric radiation is computed from air temperature and vapour pressure using Brutsaert's formula with a correction factor taking into account the 5% underestimation shown by different authors (Hatfield et al., 1983; Olioso, 1992; Ortega-farias et al., 2000). The soil heat flux was estimated using Eq. (17). Due to power supply problems at the beginning of the experiment, some data were missing, we therefore used 270 days of data.

The comparison between daily observed and estimated available energy is presented in Fig. 5. A regression analysis yields ( $\text{W m}^{-2}$ ):  $R_{nest} - G_{est} = 0.91(R_{nmes} - G_{mes})$ ,  $R^2 = 0.94$ , and  $RMSE = 16 \text{ W m}^{-2}$ . The subscripts est and mes referred to

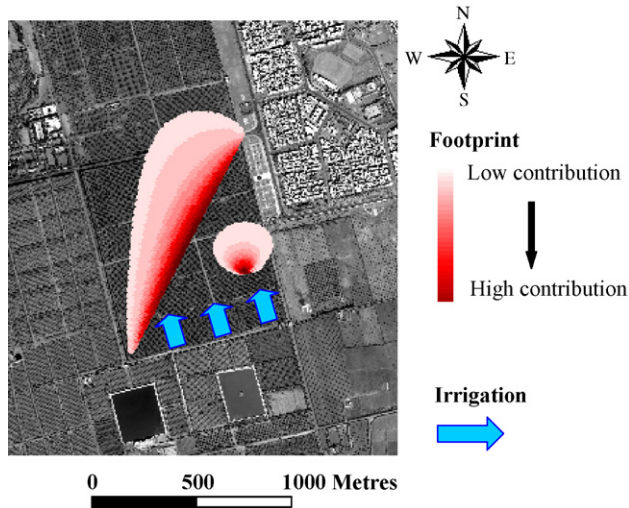

**Fig. 6 – Footprints of the LAS and EC system (corresponding to approximately 95% of the sensible heat flux) are shown in red and the irrigation schedule in blue.**

457  
458  
459  
460  
461  
462  
463  
464  
465  
466  
467  
468  
469  
470

estimated and measured values, respectively. It can be seen that the simple model used to estimate the available energy works fairly well over tall and sparse vegetation (an underestimation of 9%). It must be noted that the use of the Brutsaert's formula which was established for clear sky conditions only, may create an important scatter for low radiation values. To overcome this difficulty, a comparison between the  $R_{nmes}$  and  $R_{nest}$  using the measured and the estimated atmospheric radiation was made (not shown). A regression analysis for both comparisons yields almost the same slope ( $\approx 0.96$ ), but the  $R^2$  and RMSE differed. The  $R^2$  and RMSE were 1 and  $5 \text{ W m}^{-2}$ , and 0.95 and  $12 \text{ W m}^{-2}$  for measured and estimated atmospheric radiation, respectively.


#### 4.3. Sensible and latent heat fluxes

471  
472  
473  
474  
475  
476  
477  
478

To assess the accuracy of the LAS, a comparison of the daily sensible heat fluxes derived from the LAS and those measured from the EC system was made. The days with missing data in LAS and EC measurements were not taken into account. Missing data was mostly due to rainfall and very strong wind associated with storms which disturbed the alignment of the LAS (about 12% of the data).

479  
480  
481  
482  
483  
484  
485  
486  
487  
488  
489  
490  
491  
492

During this study, the site changes from being almost homogeneous under dry conditions or following rain events to very heterogeneous during the irrigation. The irrigation method creates a large difference in terms of soil moisture which leads to a large difference in the characteristics of the source area sampled by the LAS and by EC, respectively. In Fig. 6, the footprints of the LAS and EC (corresponding to approximately 95% of the sensible heat flux) for the prevailing wind direction are presented, together with the orientation of irrigation. It can be seen that during the irrigation the small source area of the EC will be irrigated much sooner than the large area of the LAS. Consequently, the EC source area started to dry out before the entire source area of the LAS is irrigated. Fig. 7a and b, present comparisons between  $H_{LAS}$  and  $H_{EC}$  over

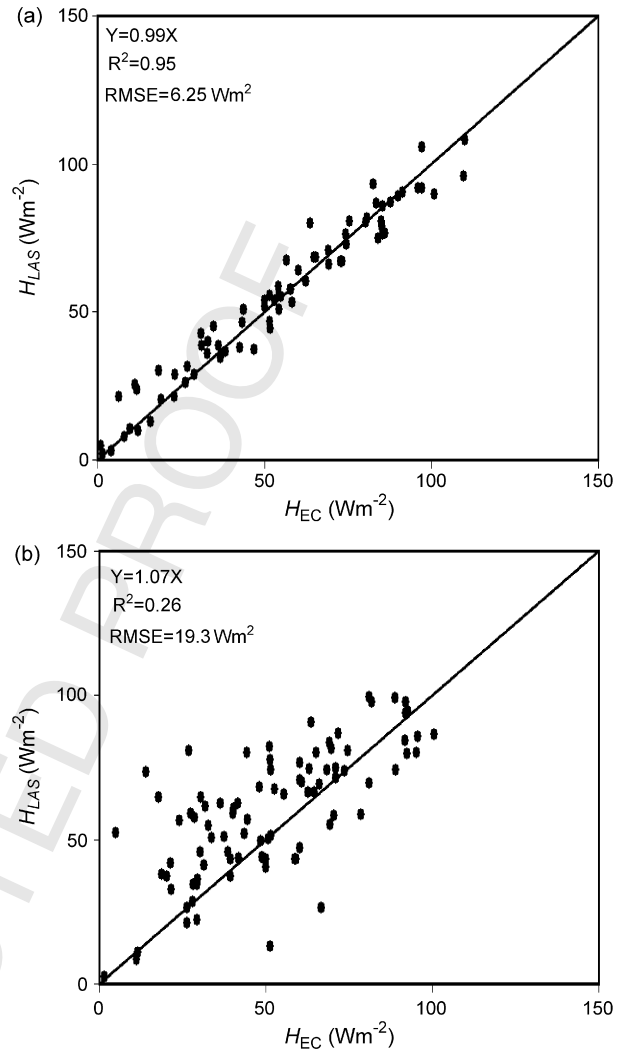


**Fig. 7 – (a) Comparison between the daily averaged LAS and EC sensible heat fluxes,  $H_{LAS}$  and  $H_{EC}$ , respectively, during homogenous conditions (dry conditions and days following the rain events). (b) Comparison between the daily averaged LAS and EC sensible heat fluxes,  $H_{LAS}$  and  $H_{EC}$ , respectively, during heterogeneous conditions (periods of irrigation events).**


492  
493  
494  
495  
496  
497  
498  
499  
500  
501  
502  
503  
504  
505  
506  
507

homogeneous and heterogeneous conditions, respectively. The correlation between  $H_{LAS}$  and  $H_{EC}$  during the irrigation was very poor ( $R^2 = 0.26$ ,  $RMSE = 19.3 \text{ W m}^{-2}$ ), this disagreement was expected due to the irrigation method used, which causes a large heterogeneity in soil humidity of the sources area of the LAS and EC, which in turn affects the sensible heat flux. In contrast, the correlation was very good ( $R^2 = 0.95$ ,  $RMSE = 6.25 \text{ W m}^{-2}$ ) during homogenous conditions (dry conditions and days following the rain events). Examining the comparison during the entire year (Fig. 8), yields a satisfactory agreement ( $R^2 = 0.72$ ,  $RMSE = 13.3 \text{ W m}^{-2}$ ). It can be therefore concluded that the effect induced by the irrigation method is compensated when comparison is made during the entire season. This result is of great interest since it indicates that the LAS can be effectively used to accurately estimate spatially



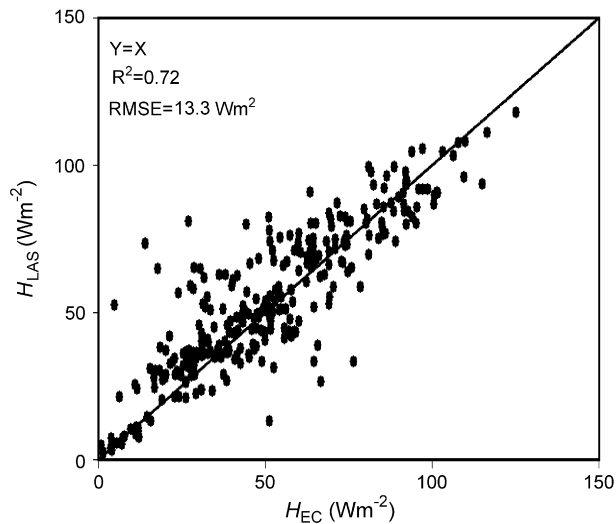


**Fig. 8 – Comparison between the daily averaged LAS and EC sensible heat fluxes,  $H_{LAS}$  and  $H_{EC}$ , respectively, during the entire year.**

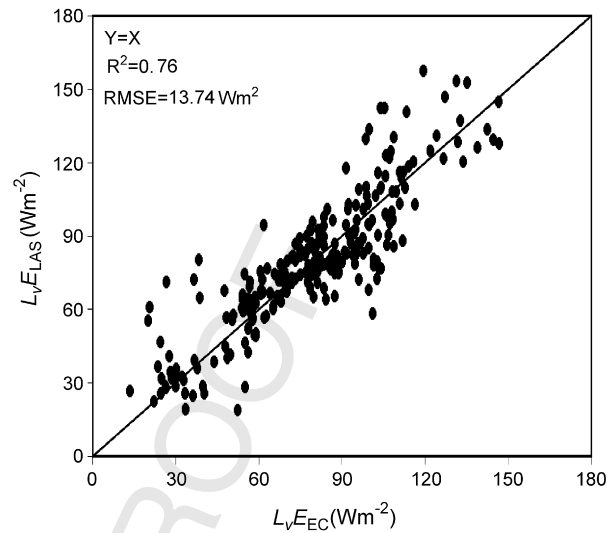

**Fig. 10 – Comparison between daily observed (derived from EC system  $L_vE_{EC}$ ) and simulated evapotranspiration (derived from the LAS using the measured available energy,  $L_vE_{LAS}$ ).**

507 averaged sensible heat flux despite the heterogeneity induced  
508 by the irrigation method.

509  
510 A comparison between the daily latent heat flux from the  
511 LAS ( $L_vE_{LAS}$ ) calculated as  $L_vE_{LAS} = R_{nest} - G_{est} - H_{LAS}$  and the  
512 latent heat flux from EC ( $L_vE_{EC}$ ) is shown in Fig. 9. The  
513 regression analysis gives:  $L_vE_{LAS} = 0.86L_vE_{EC}$ ,  $R^2 = 0.72$  and  
514  $RMSE = 18.25 W m^{-2}$ . Such discrepancy can be explained by  
515 the combination of several factors. First, the error asso-  
516 ciated with the closure of the measured energy balance is  
517 translated into an error in the simulated  $L_vE_{LAS}$ . Second,  
518 since the scintillometer-based  $L_vE_{LAS}$  is obtained as the  
519 residual term of the energy balance, any difference between  
520 measured and simulated available energy is directly

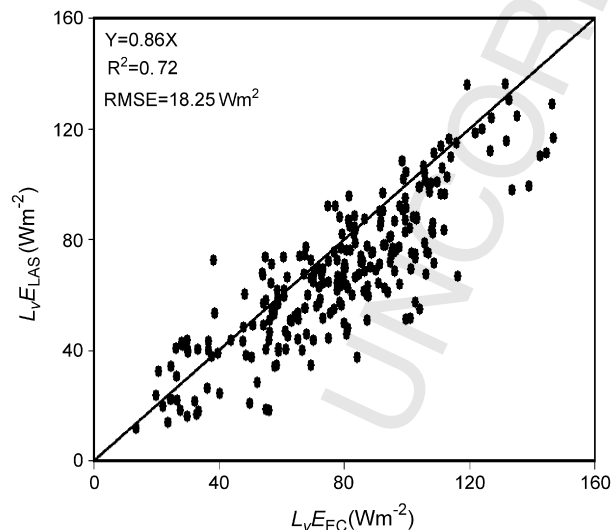

**Fig. 9 – Comparison between daily observed (derived from EC system  $L_vE_{EC}$ ) and simulated evapotranspiration (derived from the LAS using the estimated available energy,  $L_vE_{LAS}$ ).**


521 translated into error in the simulated  $L_vE_{LAS}$ . In this regard,  
522 comparison between the  $L_vE_{LAS}$  simulated using the mea-  
523 sured available energy values (Fig. 10) and the  $L_vE_{EC}$  yields to  
524  $L_vE_{LAS} = 0.96L_vE_{EC}$ ,  $R^2 = 0.74$  with  $RMSE = 14 W m^{-2}$ . More  
525 importantly, the impact of the difference in the footprint  
526 of the LAS and EC which was very important during the  
527 irrigation events greatly influences the correspondence  
528 between observed and simulated fluxes. Although a mod-  
529 erate discrepancy is observed, the correspondence between  
530 measured and simulated  $L_vE$  is deemed acceptable. There-  
531 fore, one can conclude that combining LAS measurements  
532 with estimates of available energy is a very effective and  
533 operational tool for seasonal crop water consumption  
534 assessment at a scale relevant to the managers (i.e. the  
535 irrigation district).

#### 4.4. Irrigation efficiency assessment

536  
537 In this paragraph, we investigate the efficiency of the irrigation  
538 practices over the study site which is representative of the  
539 practices in the region. To achieve this, crop water require-  
540 ments deduced from the FAO-56 method (FAO-56 paper, Allen  
541 et al., 1998) were compared to the LAS-based estimates of  
542  $ET_{LAS}$  and the sum of the rainfall and irrigation.

543 During the experiment, the total irrigation applied by the  
544 farmer was about 800 mm over 10 irrigation cycles. Total  
545 precipitation ( $P$ ) during the experiment reached 354 mm,  
546 which is much higher than the annual average of 240 mm.  
547 The yearly estimated evapotranspiration ( $ET_{LAS}$ ) derived from  
548 the LAS was calculated by summing up the daily values. The  
549 result in terms of yearly estimates of ET using our approach  
550 ( $ET_{LAS}$ ) was about 860 mm.

551 In order to compare this value against that suggested by the  
552 FAO, the crop water requirement ( $ET_c$ ) was calculated  
553 following the standard procedure of the FAO (FAO-56 paper;  
554 Allen et al., 1998).  $ET_c$  is computed by multiplying reference

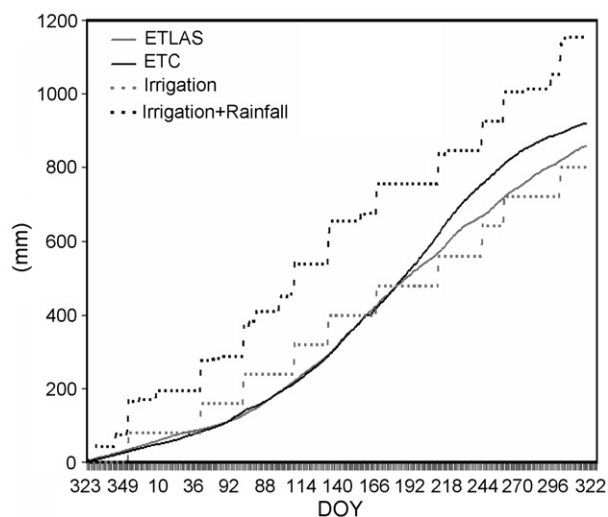

**Fig. 11 – Accumulated crop evapotranspiration derived from FOA-56 ( $ET_c$ ), Evapotranspiration derived from the LAS ( $ET_{LAS}$ ), irrigation applied by the farmer and sum of irrigation and rainfall.**

554 evapotranspiration ( $ET_0$ ) by a crop coefficient  $K_c$ . The mean  
 555 value of  $K_c$  for olive orchard under environmental conditions is  
 556 0.68 (Er-Raki et al., 2006). The yearly simulated  $ET_c$  during our  
 557 experiment was 920 mm. The accumulated  $ET_{LAS}$  and  $ET_c$  for  
 558 olive season are shown in Fig. 11. By analyzing this figure, the  
 559 accumulated  $ET_{LAS}$  and  $ET_c$  curves are close over the period  
 560 DOY 323 to DOY 190. For the remaining days,  $ET_c$  was higher  
 561 than  $ET_{LAS}$ . This is due to the stress induced by irrigation delay.  
 562 It can be noticed also in this figure, that although the sum of  
 563 irrigation and rainfall was greater than  $ET_c$ , one stress event  
 564 occurred (from DOY 190). Such behaviour can be explained by  
 565 inadequate distribution of irrigation. In fact, the farmer  
 566 irrigated just after the recorded rainfall (four irrigations were  
 567 applied in this case: DOY 353 (2002), 109 (2003), 169 (2003) and  
 568 303 (2003)). Some of those irrigations should have been  
 569 delayed (169 (2003), 309 (2003), 109 (2003)) and the first  
 570 irrigation (353 (2002)) was unnecessary because it had rained  
 571 for a long period beforehand. In addition, an important  
 572 amount of water was lost by the flood irrigation technique.  
 573 This quantity was lost by deep percolation and runoff and is  
 574 noted  $\Delta P$ . In order to quantify this term, the water balance  
 575 equation of the FAO method on a yearly basis (Allen et al.,  
 576 1998) was applied. In this study we ignored the variation in the  
 577 water storage in the study area, because the initial conditions  
 578 were similar to the conditions at the end of the experiment. So  
 579  $\Delta P$  approached the sum of the total precipitation and irrigation  
 580 minus the cumulative of the  $ET_{LAS}$ . The yearly  $\Delta P$  obtained was  
 581 around 295 mm considering the irrigation's quantity applied  
 582 by the farmer, so it represents about 37% of the total applied  
 583 irrigation. Another study was done over the same field by  
 584 Williams et al. (2003) and showed that after the irrigation the  
 585 soil evaporation represents about 14–28% of the total  
 586 evapotranspiration. The result revealed that the farmer  
 587 applied a large amount of water and the irrigation system  
 588 was not appropriate for the orchard in the Haouz plain  
 589 conditions.  
 590

## 5. Conclusion

590 The purpose of this investigation was to identify whether the  
 591 large aperture scintillometer combined with a simple available  
 592 energy model could be used to monitor the water consumption  
 593 in difficult environment conditions (tall vegetation,  
 594 irrigation method which has an irregular pattern in space  
 595 and time, and variable soil characteristics). An experiment  
 596 was conducted over the irrigated oliveyard of Agdal which is  
 597 located in Marrakech (Morocco). An eddy covariance (local  
 598 scale measurements) and LAS (large scale measurements)  
 599 were installed above the olive trees.  
 600

601 The daily sensible heat fluxes derived from the LAS agreed  
 602 reasonably well with those derived from the EC during  
 603 homogenous conditions (dry conditions and days following  
 604 the rain events). This result confirms that the LAS works well  
 605 over tall and sparse vegetation. During the irrigation events  
 606 (flooding irrigation), the comparison showed a large scatter  
 607 between the two methods due to the large difference in the  
 608 sources area of the LAS and EC created by the irrigation  
 609 method.  
 610

611 Consequently, the comparison between the latent heat flux  
 612 derived from the LAS and that measured by EC yields an  
 613 acceptable agreement with an underestimation of 14% and a  
 614 large scatter ( $R^2 = 0.72$  and  $RMSE = 18.25 \text{ W m}^{-2}$ ). This differ-  
 615 ence was related to the poor closure of the energy balance  
 616 based on EC turbulent fluxes estimates, the different char-  
 617 acteristics between the source areas of the LAS and EC (due to  
 618 the irrigation method which created a large heterogeneity in  
 619 soil moisture), and the use of Brutsaert's formula to compute  
 620 downward longwave radiation. It is concluded that the use of  
 621 estimate available energy which can be derived from the  
 622 satellite image, the scintillometer is a potentially useful tool to  
 623 obtain the latent heat flux at large scale even over complex  
 624 surfaces. Therefore, this device provides a great potential for  
 625 practical application of remote sensing approaches to basin  
 626 scale water balance studies.  
 627

628 In addition, the study revealed that the method of irrigation  
 629 applied by the farmer was not appropriate for the orchard  
 630 conditions, because a large quantity of water is ( $\approx 295 \text{ mm}$ ) lost  
 631 by deep percolation and overflow ( $\approx 37\%$  of total irrigation).  
 632 One can therefore conclude that the irrigation is not efficient,  
 633 because the irrigation monitoring is done by visually observing  
 634 the physical conditions of the plant which is not sufficient to  
 635 manage the irrigation. As a result, it would be advisable to  
 636 improve the irrigation management and to recommend to the  
 637 farmer to follow a more technical irrigation scheduling criteria  
 638 such as, that is by taking into account the actual soil type,  
 639 slope, length of water run, flow rates, and weather forecast.  
 640

## Acknowledgements

639 This research was situated within the framework of SUDMED  
 640 project and E.U. funded IRRIMED (<http://www.irrimed.org>)  
 641 project. A part of this study has been supported by the Dutch  
 642 Technology Foundation (STW project WMO 4133), the research  
 643 council of the Netherlands Organization of Scientific Research  
 644 (NWO). During a few months in 2002 the third author (J.C.B.  
 645 Hoedjes) was employed by Wageningen University on STW  
 646

funding. We are grateful to the Institut de Recherche pour le Développement (IRD). We are indebted to the director and staff of the Agdal olive orchard for access and use of the field site and for assistance with irrigation scheduling and security. Oscar K. Hartogensis is acknowledged for his assistance with setting up the instruments at Agdal in September 2002, and for his advise for raw data processing. In addition, he is thanked for his valuable comments on this manuscript. The authors acknowledge the helpful comments of the three anonymous referees.

## Appendix A

The contributing surface to scalar flux measurement from the EC and the LAS, called the source area (SA), was calculated using the analytical footprint model proposed by Horst and Weil (1992, 1994). The footprint function  $f$ , or the contribution per unit surface flux of each unit element of the upwind surface area to a measured vertical flux, relates to the vertical flux measured at height  $z_m$ ,  $F(x, y, z_m)$ , to the spatial distribution of surface fluxes,  $F(x, y, z = 0) \equiv F_0(x, y)$ , i.e.,

$$F(x, y, z_m) = \int_{-\infty}^{\infty} \int_{-\infty}^{\infty} F_0(x', y') f(x - x', y - y', z_m) dx' dy' \quad (\text{A.1})$$

(Horst and Weil, 1994). Where  $x$  and  $y$ , respectively, are the upwind and crosswind distances (m) from the point where the measurements are taken. The source area arises from the integration of the footprint function. In this study we calculated the crosswind-integrated footprint function using the model of Horst and Weil (1994):

$$\bar{f}^y(x, z_m) \cong \frac{dz}{dx} \frac{z_m}{z^2} \frac{\bar{u}(z_m)}{\bar{u}(cz)} A \exp\left[-\left(\frac{z_m}{bz}\right)^r\right] \quad (\text{A.2})$$

where  $z$  is the mean plume height for diffusion from a surface source and  $u(z)$  the mean wind speed profile. The variables  $A$ ,  $b$  and  $c$  are gamma functions of shape parameter  $r$ . We have assumed that the violation of the MOST is small (Meijninger et al., 2002b). In the case of the LAS, one has to combine  $f$  with the spatial weighting function  $W(x)$  of the LAS in order to calculate the source area.

## Appendix B

The root mean square error (RMSE), which measures the variation of predicted values around observed ones, is calculated as follows:

$$\text{RMSE} = \sqrt{\frac{1}{n} \sum_{i=1}^n (y_{i\text{sim}} - y_{i\text{obs}})^2}$$

where  $y_{i\text{sim}}$  and  $y_{i\text{obs}}$  are the values of simulated and observed variables, respectively, and  $n$  is the number of observations.

## REFERENCES

- Allen, R.G., Pereira, L.S., Raes, D., Smith, M., 1998. Crop Evapotranspiration—Guidelines for Computing Crop Water Requirements, Irrigation and Drain, Paper No. 56. FAO, Rome, Italy, 300 pp.
- Andreas, E.L., 1989. Two-wavelength method of measuring path-averaged turbulent surface heat fluxes. *J. Atmos. Oceanic Technol.* 6, 280–292.
- André, R.G.B., Viswanadham, Y., 1983. Radiation balance of soybeans grown in Brazil. *Agric. For. Meteorol.* 30, 157–173.
- Angstrom, A., 1918. A study of the net radiation of the atmosphere. *Smithson. Inst. Coll.* 65, 159–161.
- Baldocchi, D.D., Xu, L., Kiang, N., 2004. How plant functional-type, weather, seasonal drought, and soil physical properties alter water and energy fluxes of an oak-grass savanna and an annual grassland. *Agric. For. Meteorol.* 123, 13–39.
- Beyrich, F., Leps, J.P., Mauder, M., Bange, J., Foken, T., Huneke, S., Lohse, H., Ludi, A., Meijninger, W.M.L., Mironov, D., Weisensee, U., Zittel, P., 2006. Area averaged surface fluxes over the Litfass region based on eddy-covariance measurements. *Boundary-Layer Meteorol.* 121, 33–65.
- Beyrich, F., Richter, S.H., Weisensee, U., Koshiesk, W., Bosveld, F., Lohse, H., De Bruin, H.A.R., Hartogensis, O.K., Bange, J., Vogt, R., 2000. The LITFASS-98 experiment: fluxes over a heterogeneous land surface. In: 14th Symposium on Boundary Layer and Turbulence, 7–11 August, 2000, American Meteorological Society, Aspen, CO, pp. 9–10.
- Brunt, D., 1932. Notes on radiation in the atmosphere. *Q. J. R. Meteorol. Res.* 58, 389–418.
- Brutsaert, W., 1975. On a derivable formula for long-wave radiation from clear skies. *Water Resour. Res.* 11, 742–744.
- Chehbouni, A., Escadafal, R., Dedieu, G., Errouane, S., Boulet, G., Duchemin, B., Mougenot, B., Simonneaux, V., Seghieri, J., Timouk, F., 2003. A multidisciplinary program for assessing the sustainability of water resources in semi-arid basin in Morocco: SUDMED. In: Proceedings of the EGS-AGU-EUG joint Assembly,, 6–11 April, Nice, France.
- Chehbouni, A., Escadafal, R., Boulet, G., Duchemin, B., Dedieu, G., Hannich, L., et al., 2004. Integrated modelling and remote sensing approach for sustainable management of water resources in Tensift region (SudMed): preliminary results, current status and new challenges. In: Integrated Water Resources Research and Development southeastern Morocco, International Conference, 1–2 April 2004, Ouarzazate, Morocco.
- Chehbouni, A., Watts, C., Lagouarde, J.P., Kerr, Y.H., Rodriguez, J.C., Bonnnefond, J.M., Santiago, F., Dedieu, G., Goodrich, D.C., Unkrich, C., 2000. Estimation of heat fluxes and momentum fluxes over complex terrain using a large aperture scintillometer. *Agric. For. Meteorol.* 105, 215–226.
- Chehbouni, A., Kerr, Y.H., Watts, C., Hartogensis, O., Goodrich, D.C., Scott, R., Schieldge, J., Lee, K., Shuttleworth, W.J., Dedieu, G., De Bruin, H.A.R., 1999. Estimation of area-average sensible heat flux using a large aperture scintillometer. *Water Resour. Res.* 35, 2505–2512.
- De Bruin, H.A.R., Kohsiek, W., Van den Hurk, B.J.J.M., 1993. A verification of some methods to determine the fluxes of momentum, sensible heat and water vapour using standard deviation and structure parameter of scalar meteorological quantities. *Boundary-Layer Meteorol.* 76, 25–40.
- Er-Raki, S., Chehbouni, G., Guemouria, N., Ezzahar, J., Hadria, R., Duchemin, B., Boulet, G., Chehbouni, A., 2006. Developing crop coefficients for olive, wheat and orange growing in semi arid region (Marrakech, Morocco). *Integrated Water*

- 759 Resources Management and Challenges of the Sustainable  
760 Development (GIRE3D), Marrakech, 23–25 May 2006.
- 761 Hartogensis, O.K., De Bruin, H.A.R., Van De Wiel, 2002.  
762 Displaced-beam small aperture scintillometer test. Part II.  
763 CASES-99 stable. *Boundary-Layer Meteorol.* 28, 149–176.
- 764 Hatfield, J.L., Reginato, R.J., Idso, S.B., 1983. Comparison of long-  
765 wave radiation calculation methods over the United States.  
766 *Water Resour. Res.* 19, 285–288.
- 767 Hill, R.J., Clifford, S.F., Lawrence, R.S., 1980. Refractive index and  
768 absorption fluctuations in the infrared caused by  
769 temperature, humidity and pressure fluctuations. *J. Opt.*  
770 *Soc. Am.* 70, 1192–1205.
- 771 Hoedjes, J.C.B., Zuurbier, R.M., Watts, C.J., 2002. Large aperture  
772 scintillometer used over a homogeneous irrigated area,  
773 partly affected by regional advection. *Boundary-Layer*  
774 *Meteorol.* 105, 99–117.
- 775 Horst, T.W., Weil, J.C., 1992. Footprint estimation for scalar flux  
776 measurements in the atmospheric surface layer. *Boundary-*  
777 *Layer Meteorol.* 59, 279–296.
- 778 Horst, T.W., Weil, J.C., 1994. How far is far enough? The fetch  
779 requirements for micrometeorological measurement of  
780 surface fluxes. *J. Atmos. Oceanic Technol.* 11, 1018–1025.
- 781 Idso, S.B., 1981. A set of equations for full spectrum and 8 to  
782 14 mm and 10.5 to 12.5 mm thermal radiation from  
783 cloudless skies. *Water Resour. Res.* 17, 295–304.
- 784 Jones, H.G., Archer, N., Rotenberg, E., Casa, R., 2003. Radiation  
785 measurement for plant ecophysiology. *J. Exp. Bot.* 54, 879–  
786 889.
- 787 Kohsiek, W., Meijninger, W.M.L., De Bruin, H.A.R., Beyrich, F.,  
788 2006. Saturation of the large aperture scintillometer.  
789 *Boundary-Layer Meteorol.* 121, 111–126.
- 790 Kowalik, P.J., Turner, N.C., 1983. Diurnal changes in the water  
791 relations and transpiration of a soybean crop simulated  
792 during the development of water deficit. *Irrig. Sci.* 4, 225–  
793 238.
- 794 Kustas, W.P., Daughtry, C.S.T., 1989. Estimation of the soil heat  
795 flux/net radiation ratio from spectral data. *Agric. For.*  
796 *Meteorol.* 49, 205–223.
- 797 Meijninger, W.M.L., Green, A.E., Hartogensis, O.K., Kohsiek, W.,  
798 Hoedjes, J.C.B., Zuurbier, R.M., De Bruin, H.A.R., 2002a.  
799 Determination of area-averaged water vapour fluxes with a  
800 large aperture and radio wave scintillometers over a  
801 heterogeneous surface-flevoland field experiment.  
802 *Boundary-Layer Meteorol.* 105, 63–83.
- 803 Meijninger, W.M.L., Hartogensis, O.K., Kohsiek, W., Hoedjes,  
804 J.C.B., Zuurbier, R.M., De Bruin, H.A.R., 2002b. Determination  
805 of area-averaged sensible heat fluxes with a large aperture  
806 scintillometer over a heterogeneous surface – Flevoland  
807 field experiment. *Boundary-Layer Meteorol.* 105, 37–62.
- 808 Mermier, M., Seguin, B., 1976. Le rayonnement net à Avignon-  
809 Montfavet, INRA, Station de bioclimatologie d'Avignon,  
810 Note M/76/4, 14 pp.
- 811 Monteith, J.L., 1973. *Principles of Environmental Physics.*  
812 Edward Arnold Press, 241 pp.
- 813 Monteith, J.L., Unsworth, M.H., 1990. *Principles of*  
814 *Environmental Physics.* Edward Arnold, London, 291pp.
- 815 Moore, C.J., 1986. Frequency response corrections for eddy  
816 correlation systems. *Boundary-Layer Meteorol.* 37, 17–35.
- 817 Norman, J.M., Kustas, W.P., Humes, K.S., 1995. A two-source  
818 approach for estimating soil and vegetation energy fluxes  
819 from observations of directional radiometric surface  
820 temperature. *Agric. For. Meteorol.* 77, 263–293.
- 821 Ochs, G.R., Wilson, J.J., 1993. A second-generation large-aperture  
822 scintillometer, NOAA Tech. Memo, ERL WPL-232. NOAA  
823 Environmental Research Laboratories, Boulder, CO.
- Oliosio, A., 1992. Simulation des échanges d'énergie et de masse  
d'un couvert végétal dans le but de relier la transpiration et  
la photosynthèse aux mesures de réflectance et de  
température de surface, Doctorat thesis, Université de  
Montpellier, France, 250 pp.
- Ortega-farias, S., Antonioletti, R., Oliosio, A., 2000. Net radiation  
model evolution at an hourly time step for Mediterranean  
conditions. *Agronomie* 20, 157–164.
- Panofsky, H.A., Dutton, J.A., 1984. *Atmospheric Turbulence:  
Models and Methods for Engineering Applications.* John  
Wiley & Sons, New York, 397 pp.
- Poulos, G.S., Fritts, D.C., Blumen, W., Bach Jr., W.D., 2000.  
CASES-99 field experiment: an overview. In: 14th  
Symposium on Boundary Layer and Turbulence, 7–11  
August, Aspen, CO.
- Schotanus, P., Nieuwstadt, F., De Bruin, H.A.R., 1983.  
Temperature measurement with a sonic anemometer and  
its application to heat and moisture fluxes. *Boundary-Layer*  
*Meteorol.* 26, 81–93.
- Stull, R.B., 1988. *An Introduction to Boundary Layer*  
*Meteorology, Atmospheric Sciences.* Library. Kluwer  
Academic Publishers, 666 pp.
- Su, Z., Schmugge, T., Kustas, W.P., Massman, W.J., 2001. An  
evaluation of two models for estimation of the roughness  
height for heat transfer between the land surface and the  
atmosphere. *J. Appl. Meteorol.* 40, 1951–1966.
- Testi, L., Villalobos, F.J., Orgaz, F., 2004. Evapotranspiration of a  
young irrigated olive orchard in southern Spain. *Agric. For.*  
*Meteorol.* 121, 1–18.
- Thiermann, V., Grassl, H., 1992. The measurement of turbulent  
surface-layer fluxes by use of bichromatic scintillation.  
*Boundary-Layer Meteorol.* 58, 367–389.
- Twine, T.E., Kustas, W.P., Norman, J.M., Cook, D.R., Houser, P.R.,  
Meyers, T.P., Prueger, J.H., Starks, P.J., Wesly, M.L., 2000.  
Correcting Eddy-covariance flux underestimates over a  
grassland. *Agric. For. Meteorol.* 103, 279–300.
- Van Dijk, A., Kohsiek, W., De Bruin, H.A.R., 2003. Oxygen  
sensitivity of krypton and lymann- $\alpha$  hygrometers. *J. Atmos.*  
*Oceanic Technol.* 20, 143–151.
- Villalobos, F.J., Orgaz, F., Testi, L., Fereres, E., 2000.  
Measurement and modeling of evapotranspiration of olive  
(*Olea europaea* L.) orchards. *Eur. J. Agron.* 13, 155–163.
- Vogt, R., Christen, A., Pitacco, A., 2004. Scintillometer  
measurements in a Cork Oak and an Olive tree plantation.  
In: 26th Conference on Agricultural and Forest Meteorology,  
23–27 August, Vancouver, BC, Canada.
- Webb, E.K., Pearman, G.I., Leunin, R., 1980. Correction of flux  
measurements for density effects due to heat and water  
vapor transfer. *Q. J. R. Meteorol. Soc.* 106, 85–100.
- Wesely, M.L., 1976. The combined effect of temperature and  
humidity fluctuations on refractive index. *J. Appl. Meteorol.*  
15, 43–49.
- Wilczak, J., Oncley, S., Stage, S.A., 2001. Sonic anemometer tilt  
correction algorithms. *Boundary-Layer Meteorol.* 99, 127–  
150.
- Williams, D.G., Cable, W., Hultine, K., Yezpez, E., Er-Raki, S.,  
Hoedjes, J.C.B., Boulet, G., De Bruin, H.A.R., Chehbouni, A.,  
Timouk, F., 2003. Suivi de la répartition de  
l'évapotranspiration dans une oliveraie (*Olea europaea* L.) à  
l'aide des techniques de l'eddy covariance, des flux de sève  
et des isotopes stables. Vèmes Journées de l'Ecologie  
Fonctionnelle, 12 au 14 Mars 2003 à Nancy.
- Wyngaard, J.C., Izumi, Y., Collins Jr., S.A., 1971. Behavior of the  
refractive index structure parameter near the ground. *J. Opt.*  
*Soc. Am.* 61, 1646–1650.